

AEGLOS GLASS DISPLAY SERIES (ADS)

ADS 玻璃展示櫃



ICE CREAM DISPLAY FREEZERS

冰淇淋櫃



CAKE DISPLAY

蛋糕櫃



SUSHI DISPLAY

壽司櫃





Ice Cream Display Freezers

冰淇淋櫃

展示你的人氣冰淇淋的首選展示櫃，配以超白玻璃，獨特的氣流循環設計以及電子數字板，助你輕鬆使用的同時有效監察故障表現。

An ideal freezer with ultra clear glass case to display your most popular ice cream, powered by a unique design for air movement and made easy-to-use with a clear digital display to monitor fail-safe performance

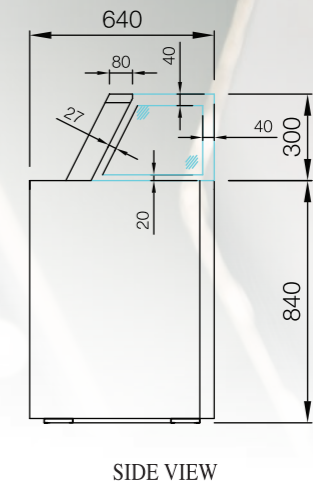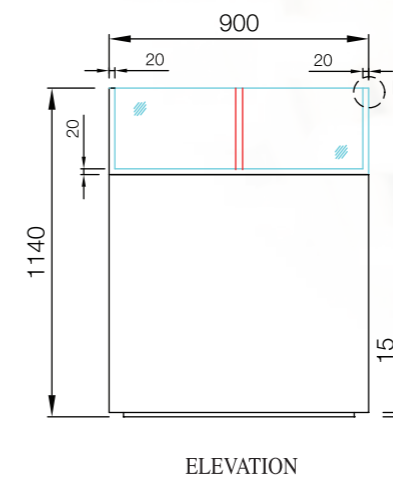

Product Features 產品優點

- 外觀精美的單層超白玻璃展示櫃 (或配雙層發熱玻璃)
- 頂前玻璃45°角接駁
- 底部配暖白色燈罩
- 暖白色LED燈帶
- 嵌入式配固定百葉
- 玻璃趟門配不銹鋼門框
- 獨特的氣流循環設計
- 操作簡便的數字控制面板配搭故障提示系統
- 自動除霜
- 配置化水裝置，無需連接排水管
- 有效率的風冷循環系統
- 自動化水設計
- 220v/50Hz
- Contemporary rectangular shaped single layer ultra clear glass case (or double layered glass case with heating film showcase)
- 45 degree angled edges for top and front glass
- Warm white light box on display vase
- Warm white LED strip lighting
- Built-in type with die-punched type louver
- Glass sliding doors with stainless steel frame on the operator's side
- Unique design for air movement
- Digital controller for easy operation and fail-safe performance, featuring clear digital display
- Automatic defrost
- Defrost water-vaporiser, drain connection not required
- Efficient forced air cooling system
- Self evaporating, condensation water, drainage not required.
- 220v/50Hz

Alternative 備選


- 雙層強化玻璃加發熱膜
- 不同顏色和板材可選
- 所有可見邊V-Cut
- 趟門可做雙層發熱玻璃
- 220v/60Hz
- Double layer toughened glass with heated film
- Different colors and finishes
- V-cut for all visible bends
- Optional double layer glasses with heated film sliding door
- 220v/60Hz

Cake Display

蛋糕櫃

此展示櫃以出色的循環氣流設計防止食物變乾，確保你的糕餅美點於外觀及狀態上保持出色的品質。同時配備自動除霜及高效風冷循環系統。

This series utilizes an export design for air movement to prevent food drying with an ultimate aim of displaying your delicious bakery treats in a good taste and in style. Other helpful features include automatic defrostation and an efficient forced air cooling system.

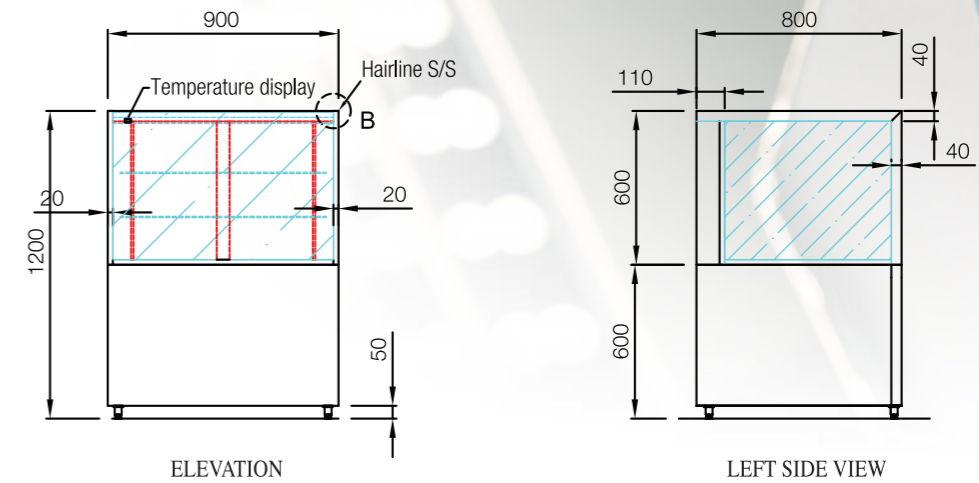

Product Features 產品優點

- 極具現代感的無邊框雙層發熱玻璃展示櫃
- 頂前玻璃45°角接駁
- 底部配暖白色燈罩
- 暖白色LED燈帶
- 玻璃趟門配不銹鋼門框
- 循環氣流設計防止食物變乾
- 準備充填、高密度的發泡層
- 操作簡便的數字控制面板配搭故障提示系統
- 自動除霜
- 配置化水盆，無需連接排水管
- 有效率的風冷循環系統
- 自動化水設計
- 220v/50Hz
- Contemporary rectangular shaped double layer ultra clear glass case with heating film showcase
- 45 degree angled edges for top and front glass
- Warm white light box on display base
- Warm white LED strip lighting
- Glass sliding doors with stainless steel frame on the operator's side
- Export design for air movement to prevent food drying
- Precision injection, high density polyurethane insulation
- Digital controller for easy operation and fail-safe performance, featuring clear digital display
- Automatic defrost
- Defrost water-vaporiser, drain connection not required
- Efficient forced air cooling system
- Self evaporating, condensation water, drainage not required.
- 220v/50Hz

Alternative 備選




- 不同顏色和板材可選
- 經典珠寶櫃式設計
- V-Cut 可見邊位
- V-Cut 百葉
- 趟門可做雙層發熱玻璃
- 經典珠寶櫃式設計
- 220v/60Hz
- Different colors and finishes
- Classic jewelry design
- V-cut for all visible bends
- V-cut louver
- Optional double layer glasses with heated film sliding doors
- 220v/60Hz

Sushi Display

壽司櫃

以時尚美觀的玻璃展示櫃展出你的壽司系列。配以LED燈光網國以及靜置冷卻系統，此展示櫃可突出你的食材新鮮度並同時保持一流的溫度控制。

Elegantly showcase your sushi with this contemporary-looking rectangular shaped glass showcase. Featuring a white LED strip lighting and a static cooling refrigeration system, this glass case delivers visually the freshness of your sushi while boasting superior temperature control.

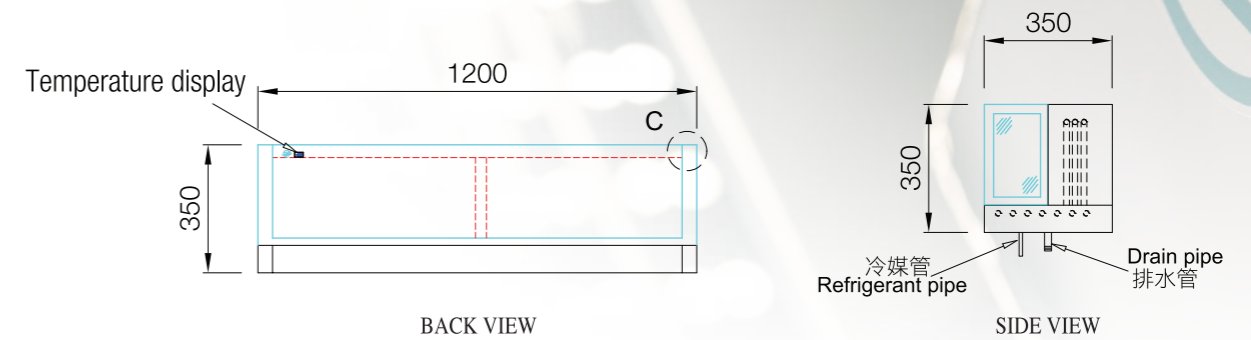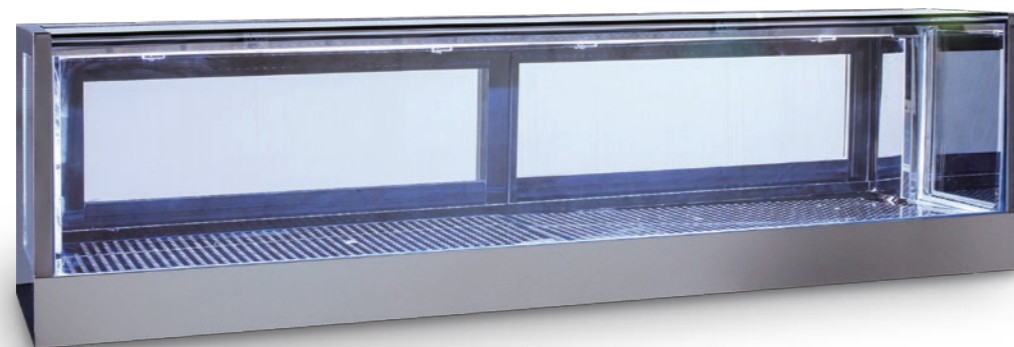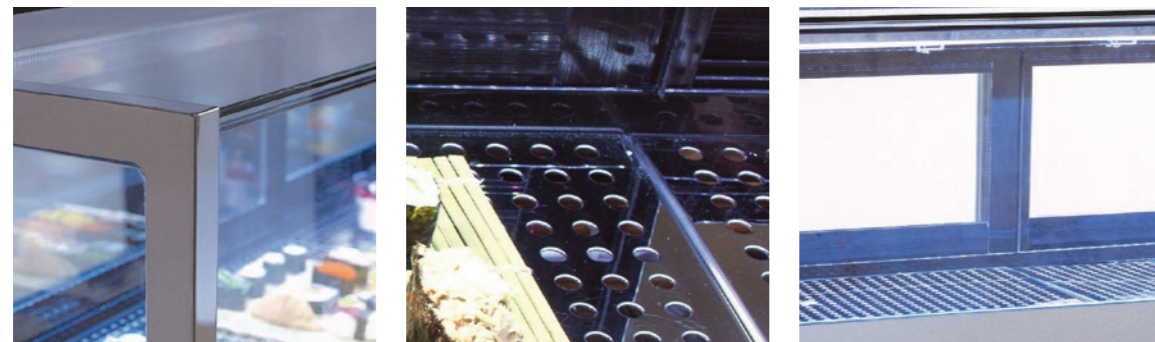

Product Features 產品優點

- 外觀精美的玻璃展示櫃
- 單層超白玻璃，無不銹鋼邊框
- 頂前玻璃45°角接駁
- 暖白色LED燈帶
- 所有可見邊V-cut
- 玻璃趟門配不銹鋼門框
- 靜置冷卻保持食物的水分
- 最長8m的分體機組連接
- 需連接排水管
- 操作簡便的數字控制面板配搭故障提示系統
- 220v/50Hz
- Contemporary rectangular shaped double layer ultra clear glass case with heating film showcase
- Stainless steel frameless, single layer, ultra clear glass showcase
- 45 degree angled
- Warm white LED strip lighting
- All visible bends are V-cut
- Glass sliding doors with stainless steel frame on the operator's side
- Static cooling refrigeration system prevents drying out of the products
- Remote refrigeration system with maximum 8 meters pipe length connection
- Drain connection is required
- Digital controller for easy operation and fail-safe performance, featuring clear digital display
- 220v/50Hz

Alternative 備選

- 不同顏色和板材可選
- 雙層一體玻璃可選
- 趟門可做雙層發熱玻璃
- 220v/60Hz
- Different colors and finishes
- Double layer toughened glass
- Optional double layer glasses with heated film sliding doors
- 220v/60Hz


Aeglos Glass Display Series (ADS)

展示櫃系列

產品編碼 Product Code

1200-C-C3

1 2 3.1 3.2

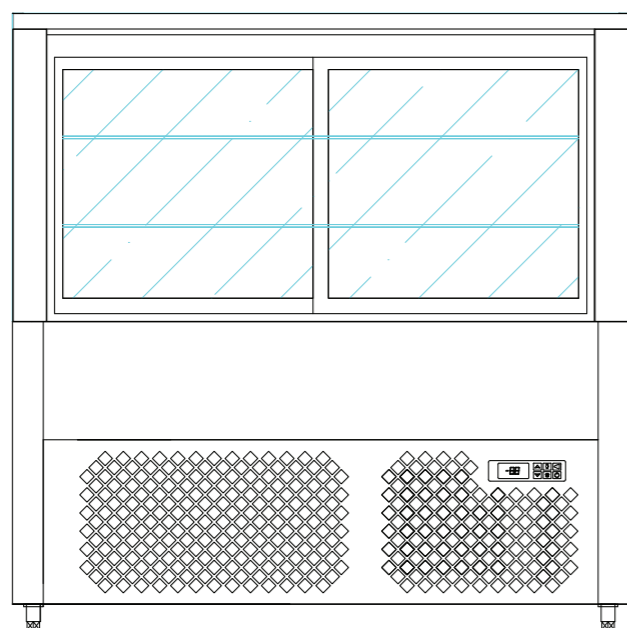

1.1 Body Length 櫃身尺寸

2. Configuration 外形

- IC = Ice Cream Display 冰淇淋展示
- C = Cake Display 蛋糕展示
- S = Sushi Display 壽司展示

3.1 Temperature Range 溫度

- C = +2°C/+8°C
- F = -22°C/-18°C

3.2 Material 材質

- 3 = 304 SS



Aeglos Glass Display Series (ADS)

ICE CREAM FREEZER 冰淇淋櫃

Model No.	900-IC-F3	1200-IC-F3	1500-IC-F3	1800-IC-F3
Temp Range (°C) 溫度 (°C)	-22~-18	-22~-18	-22~-18	-22~-18
External Dimension (mm) 外尺寸 (毫米)				
Width 寬度	900	1200	1500	1800
Depth 深度	640	640	640	640
Height 高度	1140	1140	1140	1140
Glass Case 玻璃展示部分	300	300	300	300
Evaporator 蒸發器	500	500	500	500
Condensing unit 壓縮機	325	325	325	325
Legs 腳	15	15	15	15
Capacity (容積)				
Suit for 150mm depth 1/3 GN Pan 可放置150毫米深的1/3 GN 盆數量	4	6	8	9
Power Supply 電壓 220V/50HZ/1PH				
Power Input (amps) 電源輸入 (安培)				
Start up(amps) 啟動時需輸入的電 (安培)	6.6	9	9	9.8
Running (amps) 運行時需輸入的電 (安培)	4.4	6	6	7.5
Rating Power (watts) 功率	840	1180	1180	1350
Condensing Unit (HP) 機組 (匹)	3/4	1	1	1.25
Refrigerant 制冷劑	R404a	R404a	R404a	R404a

Aeglos Glass Display Series (ADS)

CAKE DISPLAY 蛋糕櫃

Model No.	900-C-C3	1200-C-C3	1500-C-C3	1800-C-C3
Temp Range (°C) 溫度 (°C)	+2~+8	+2~+8	+2~+8	+2~+8
External Dimension (mm) 外尺寸 (毫米)				
Width 寬度	900	1200	1500	1800
Depth 深度	800	800	800	800
Height 高度	1200	1200	1200	1200
Glass Case 玻璃展示部分	600	600	600	600
Evaporator 蒸發器	230	230	230	230
Condensing unit 壓縮機	320	320	320	320
Legs 腳	50	50	50	50
Display Dimension (mm) 展示部分尺寸 (毫米)				
Base 底:				
Width 寬度	800	1100	1400	1700
Depth 深度	582	582	582	582
Mid glass shelf 層板:				
Width 寬度	775	1075	1375	1675
Depth 深度	400	400	400	400
Power Supply 電壓 220V/50HZ/1PH				
Power Input (amps) 電源輸入 (安培)				
Start up(amps) 啟動時需輸入的電 (安培)	7.2	7.8	8.55	9
Running (amps) 運行時需輸入的電 (安培)	4.8	5.2	5.7	7.5
Rating Power (watts) 功率	820	960	1090	1180
Condensing Unit (HP) 機組 (匹)	1/3	1/2	3/4	1
Max.pipe length work (m) 最長電線長度 (米)	2.5	2.5	2.5	2.5
Refrigerant 制冷劑	R134a	R134a	R134a	R134a

SUSHI DISPLAY 壽司展示櫃

Model No.	1200-S-C3	1500-S-C3	1800-S-C3
Temp Range (°C) 溫度 (°C)	+2~+8	+2~+8	+2~+8
External Dimension (mm) 外尺寸 (毫米)			
Width 寬度	1200	1500	1800
Depth 深度	350	350	350
Height 高度	350	350	350
Display Base Dimension (mm) 展示部分尺寸 (毫米)			
Base 底:			
Width 寬度	1150	1450	1750
Depth 深度	288	288	288
Power Supply 電壓 220V/50HZ/1PH			
Power Input (amps) 電源輸入 (安培)			
Start up(amps) 啟動時需輸入的電 (安培)	4	4.8	5.3
Running (amps) 運行時需輸入的電 (安培)	2.6	3.2	3.5
Rating Power (watts) 功率 (瓦特)	500	680	760
Condensing Unit (HP) 機組 (匹)	1/3	1/2	3/4
Condensing Unit Size with Housing (mm) 機組尺寸 (毫米)			
Width 寬度	530	530	530
Depth 深度	350	350	350
Height 高度	335	335	335
Max.pipe length work (m) 最長電線長度 (米)	2.5	2.5	2.5
Refrigerant 制冷劑	R134a	R134a	R134a